




dr_sample_1310.sor

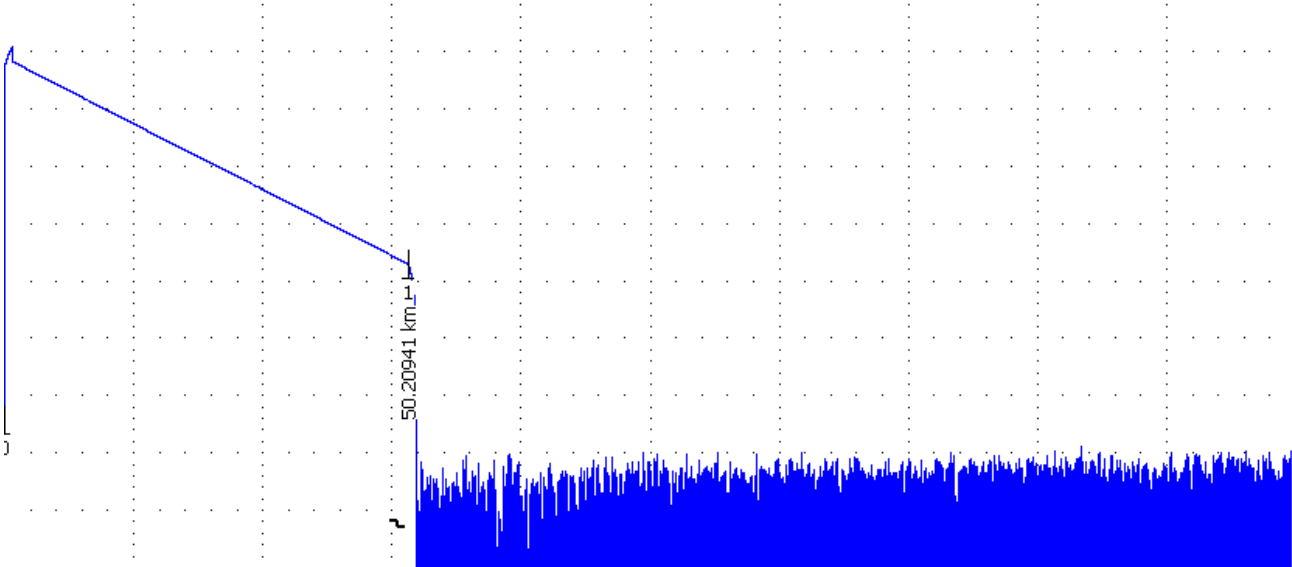

X: [0.00000, 159.99979] km; 15.99998 km/div
Y: [-45.000, 0.000] dB; 4.500 dB/div

24.11.2010 11:35:43
OPX-350 #00611
SM-1310

CID:
FID:
FT: [G.652] conventional SM fiber
OL:
TL:
CDF: as-built condition
TT: standard trace
OP:
CMT:

n: 1.475
BC: -80 dB
Lmax: 160 km
L1: 0.00000 km
L2: 159.99979 km
dL: 7.6 m
TP: 10000 ns
Time: 2:55
LT: 0.050 dB
RT: -40.000 dB
ET: 6.000 dB
CT: 0.400 dB/km

#		Distance, km	Splice loss, dB	Reflectance, dB	OF loss, dB/km	Cumulative loss, dB
0	R	0.00000		-43.441		
1	S	50.20941	>6.000		0.322	16.167